


ANRIN

LEADING WATER

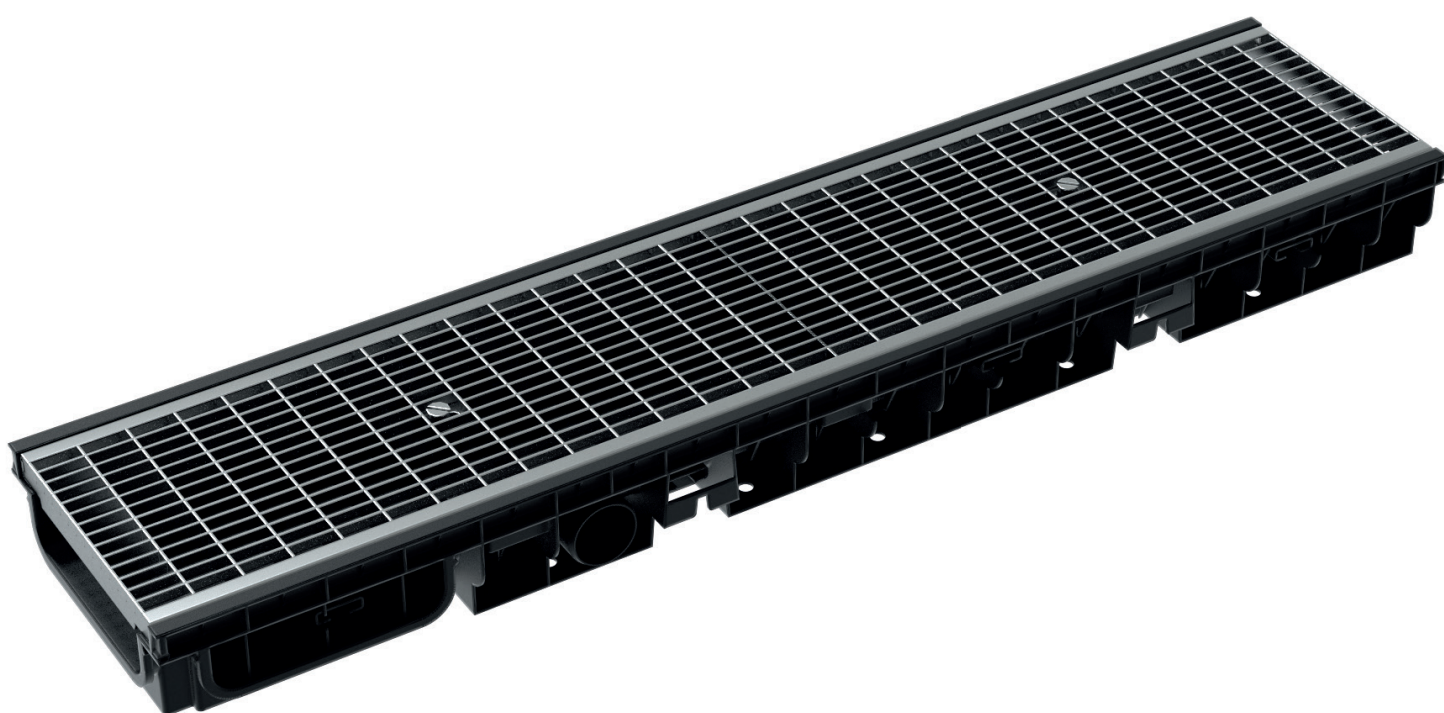

Technical data sheet

Drainage channels
LC-150

Technical data sheet

Drainage Channels LC-150

Product specifications

Product specifications		Drainage Channels LC-150 090 / 125 / 200	
Material		High Density Polyethylen (HDPE)	
Length		100 cm	
Width		22.5 cm	
Height		12.5 - 20.0 cm	
Weight		4.6 - 19.5 kg	
Nominal width		150 mm	
Slope type		Constant invert	
Fastening		Locking bridge	
Load capacity		Cl. A15, B125 and C250	
Cover gratings		Polypropylene (PP) Channels cl. A15, galvanised steel cl. B125, ductile-iron HEELGUARD cl. C250	

Material properties

Physical properties of polypropylene		Chemical properties of polypropylene	
High resistance to breaking		Resistant to road salt	
High impact strength		Resistant to acids	
Thermally stable from -20 °C to +95 °C		Resistant to alkalis and most organic solvents	
Elastic modulus 1300 to 1800 N/mm²		High UV stability	
Density 0.895 to 0.92 g/cm³		No emissions into the groundwater	

Cover gratings



Polypropylene (PP) slotted grating

Polypropylene (PP)
Length: 50 cm
MW 48 x 8 mm
Load capacity:
A15



Ductile-iron HEELGUARD

Ductile-iron
Length: 50 cm
SW: 6 mm
Load capacity:
C250




Mesh grating

Galvanised steel
Length: 100 cm
MW 30 x 10 mm
Load capacity:
B125

Technical data sheet

Drainage Channels LC-150


Channel dimensions for LC-150 090



Channel dimensions for LC-150 125



Channel dimensions for LC-150 200

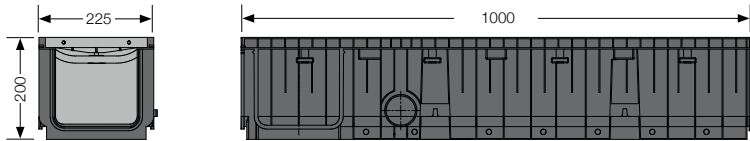

Technical data sheet

Drainage Channels LC-150

Drainage Channels LC-150 090

Article no.	EAN	Designation	Length cm	Width cm	Height cm	Weight kg
15109000	4026857033158	LC-150 090 with Polypropylene (PP) slotted grating A15	100	22.5	9.0	4.6
15109100	4026857033172	LC-150 090 with Mesh grating B125	100	22.5	9.0	7.4
15109200	4026857033189	LC-150 090 with Ductile-iron HEELGUARD C250	100	22.5	9.0	19.5
15109700	4026857033165	LC-150 090 End cap set	3.6	22.5	6.7	0.1

Drainage Channels LC-150 125

Article no.	EAN	Designation	Length cm	Width cm	Height cm	Weight kg
15112500	4026857033196	LC-150 125 with Polypropylene (PP) slotted grating A15	100	22.5	12.5	4.8
15112510	4026857033202	LC-150 125 with Mesh grating B125	100	22.5	12.5	7.6
15112520	4026857033219	LC-150 125 with Ductile-iron HEELGUARD C250	100	22.5	12.5	19.7
15112570	4026857033226	LC-150 125 End cap set	3.6	22.5	10.2	0.2

Drainage Channels LC-150 200

Article no.	EAN	Designation	Length cm	Width cm	Height cm	Weight kg
15120000	4026857033240	LC-150 200 with Polypropylene (PP) slotted grating A15	100	22.5	20.0	5.9
15120010	4026857033257	LC-150 200 with Mesh grating B125	100	22.5	20.0	8.7
15120020	4026857033264	LC-150 200 with Ductile-iron HEELGUARD C250	100	22.5	20.0	20.8
15120070	4026857033233	LC-150 200 End cap set	3.6	22.5	17.7	0.3

Technical data sheet

Drainage Channels LC-150


With ANRIN drainage systems, precipitation water should be drained off safely and quickly. In addition, the structural elements have the task of absorbing static and dynamic loads resulting from traffic-related stresses and transferring them to the surrounding subsoil. When selecting, planning and installing ANRIN drainage systems, extracts of the following technical regulations in their currently valid version must be observed.

The following installation instructions are schematic illustrations. These are exemplary and not binding. The information given here is based on our many years of experience in civil engineering and road construction and the current state of the art. Irrespective of this, planners and fabricators are always obliged to check the products and the installation instructions for their suitability. The exemplary details are simplified implementation suggestions. Superstructures are to be created specifically for each object.

Important: Insert gratings for the installation.




1. Excavate trench. Fill in and pre-compact base course. Apply concrete pad, 3 parts sand + 1 part cement + 1 part water, to base course.




2. Connect pipe connections to the pipeline.




3. Place channel elements and sump unit on the concrete pad. Align components so that they are level.



4. Position end caps.



5. Complete the series and ensure the level alignment of the components.



6. Backfill the concrete pad.



7. Lay the paving.



8. The surface should be 2 to 5 mm higher than the cover grating.

Rules and regulations

During installation, the current rules and regulations of the current state of the art must be observed.

These include:

DIN EN 1433

DIN 19580

RStO

DIN EN 206-1

DIN EN 1045-2

"Drainage channels for vehicular and pedestrian areas"

"Drainage channels for vehicular and pedestrian areas..."

"Guidelines for the standardisation of pavement structures of traffic areas"

"Concrete Part 1 - Specification, performance, production and conformity"

"Concrete, reinforced and prestressed concrete structures - Part 2: Part 2: Concrete - Specification, performance, production and conformity - Application rules for DIN EN 206-1"



ANRIN GmbH
Siemensstr. 1
59609 Anröchte
Germany

+49 (0) 29 47.97 81-0
www.anrin.com
info@anrin.com